SIEMENS

Xpressions - VMS

connection to your own mailbox

from any DSN phone

3753100	375 xxxx	*	xxxxxx	*
type in the connection number or press the mailbox key at your phone	type in your own phone number (ID-Nr.)		type in password default: 000000	

from commercial phone

+49 (0)621 487 3100	375 xxxx	*	xxxxxx	*
type in the PSTN connection number	type in your own phone number (ID-Nr.)		type in password default: 000000	



Xpressions - VMS

to create annoucements:

- lift up the reciever
- dial 3753100 or press the MWI Button at your optiset
- type in your phone number and press „*“
- type in your password and press „*“
- press „7“ for answering machine
- press „1“ for personal announcement nr.: 1 (you have 9 announcements)
- press 1 to record your personal announcement (or 3 to play back/ listen to your announcement)
- press „*“ to save and finish

After * you come back up to this position

press „0“ & „*“ for cancel and return to main menu



Xpressions - VMS

to activate one of your existing announcement:

- lift up the reciever
- dial 3753100 or press the MWI Button at your optiset
- type in your phone number and press „*“
- type in your password and press „*“
- press „7“ for answering machine
- dial the Number (1-9) from your personal announcement which you want to activate
- press „*“ to finish and save

press „0“ & „*“ for cancel and return to main menu

Xpressions - VMS

call forwarding to the voicemail box

There are three ways of forwarding a call:

1st: call forward steady ... dialtone -> 131 -> second dialtone -> **985>XXXX (last four digits of DN)**
deactivation ... dialtone -> 132
(Your phone won´t ring anymore and if you have a button FWD at your phone the LED will be red)

2nd: call forward don‘t answer ... dialtone -> 135 -> second dialtone -> **985>XXXX (last four digits of DN)**
deactivation ... dialtone -> 136
(Your phone rings 4 or 5 times. It could only be active if the first forwarding is off.)

3rd: call forward busy line ... dialtone -> 138 -> second dialtone -> **985>XXXX (last four digits of DN)**
deactivation ... dialtone -> 139

Xpressions - VMS

to play back messages:

- lift up the reciever
- dial 3753100 or press the MWI Button at your optiset
- type in you phone number and press „*“
- type in your password and press „*“
- press „3“ for play back messages (wait for the first message header)
- press „3“ for start / stop play back
- press „#“ for delete message or
- press „*“ for jump to next message header

press „0“ & „*“ for cancel and return to main menu

Xpressions - VMS

activate annoucements with special functions (1 Example):

- lift up the receiver
- dial 3753100 or press the MWI Button at your optiset
- type in your phone number and press „*“
- type in your password and press „*“
- press „8“ for special functions, „8“ for announcement for call forwarding
- press „8“ for announcement for all callers
- press „1“ for answering machine function or „0“ for announcement only
- press „1“ for personal announcement (0 for public announcement)
- type in the announcement number (1-9) which is

press „0“ & „*“ for cancel and return to main menu

Xpressions - VMS

<u>to change the password:</u>

- lift up the receiver
- dial 3753100 or press the MWI Button at the optiset
- type in your phonenumber and press „*“
- type in your password and press „*“
- press „8“ for special functions
- press „4“ for password
- type in your new password and finish with „*“

press „0“ & „*“ for cancel and return to main menu

Xpression – VMS

<u>to change/record your name:</u>

- lift up the receiver
- dial 3753100 or press the MWI Button at the optiset
- type in your phonenumber and press „*“
- type in your password and press „*“
- press „8“ for special functions
- press „7“ record personal announcement/name
- press „0“ re-record name
- press „1“ to speak your name
- press „*“ to save it

press „0“ & „*“ for cancel and return to main menu

Xpression – VMS – Hohenfels

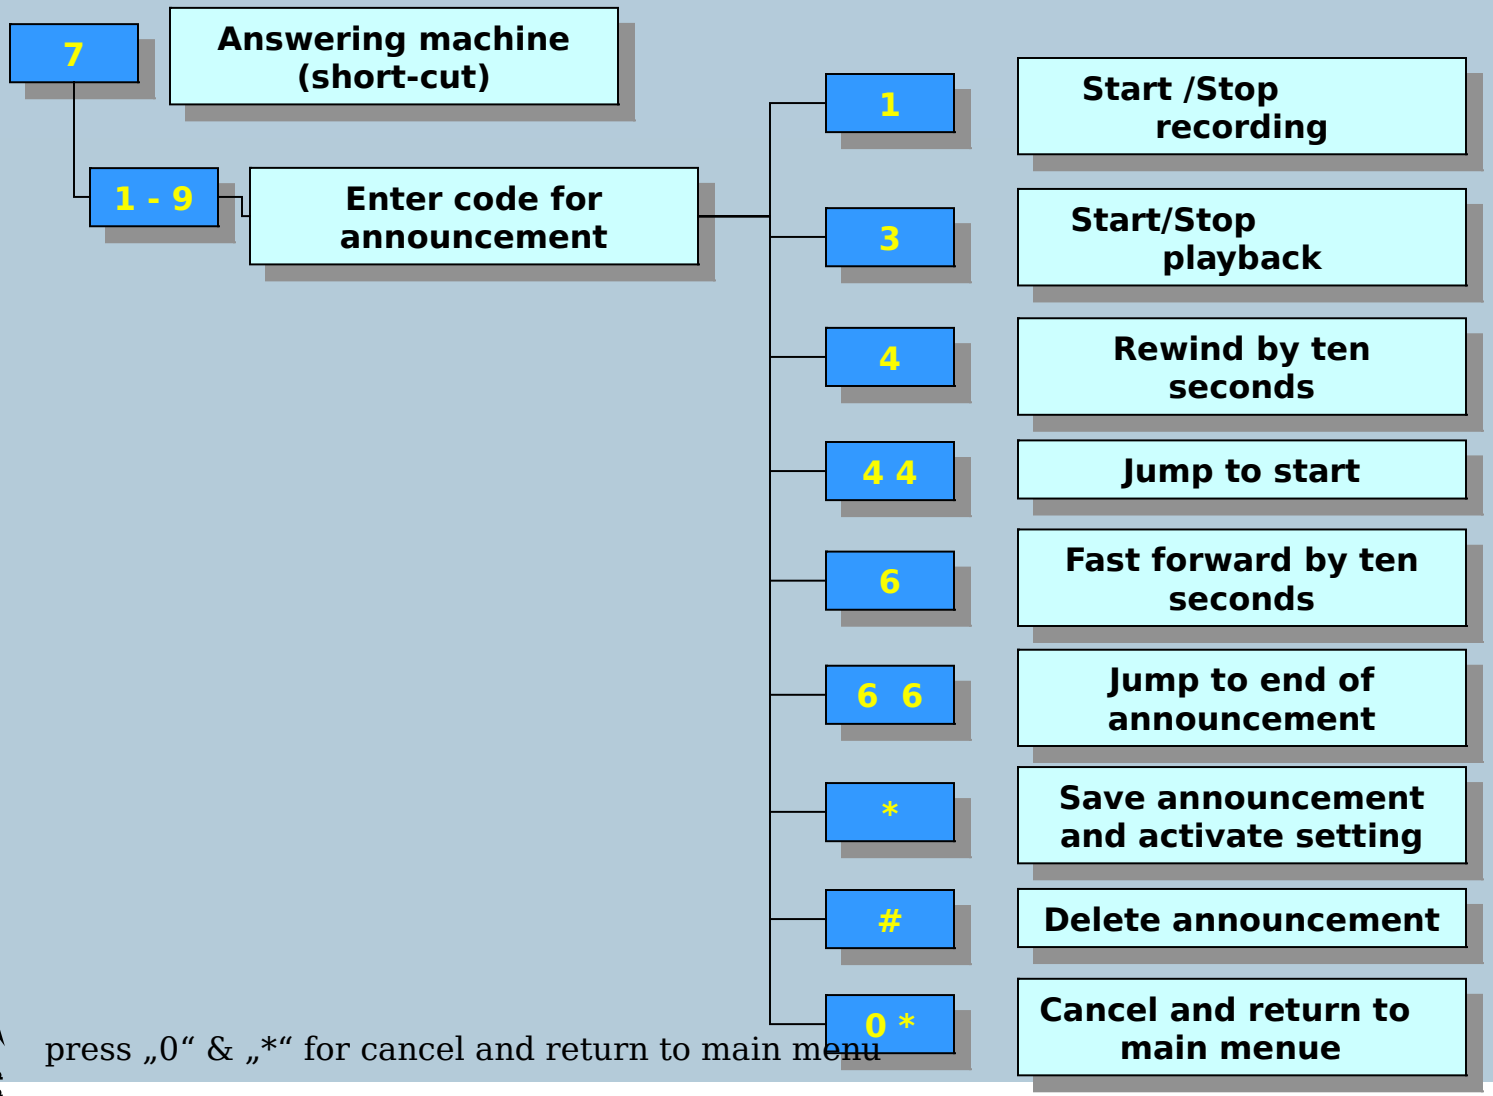

press „0“ & „*“ for cancel and return to main menu

Xpression – VMS – Hohenfels

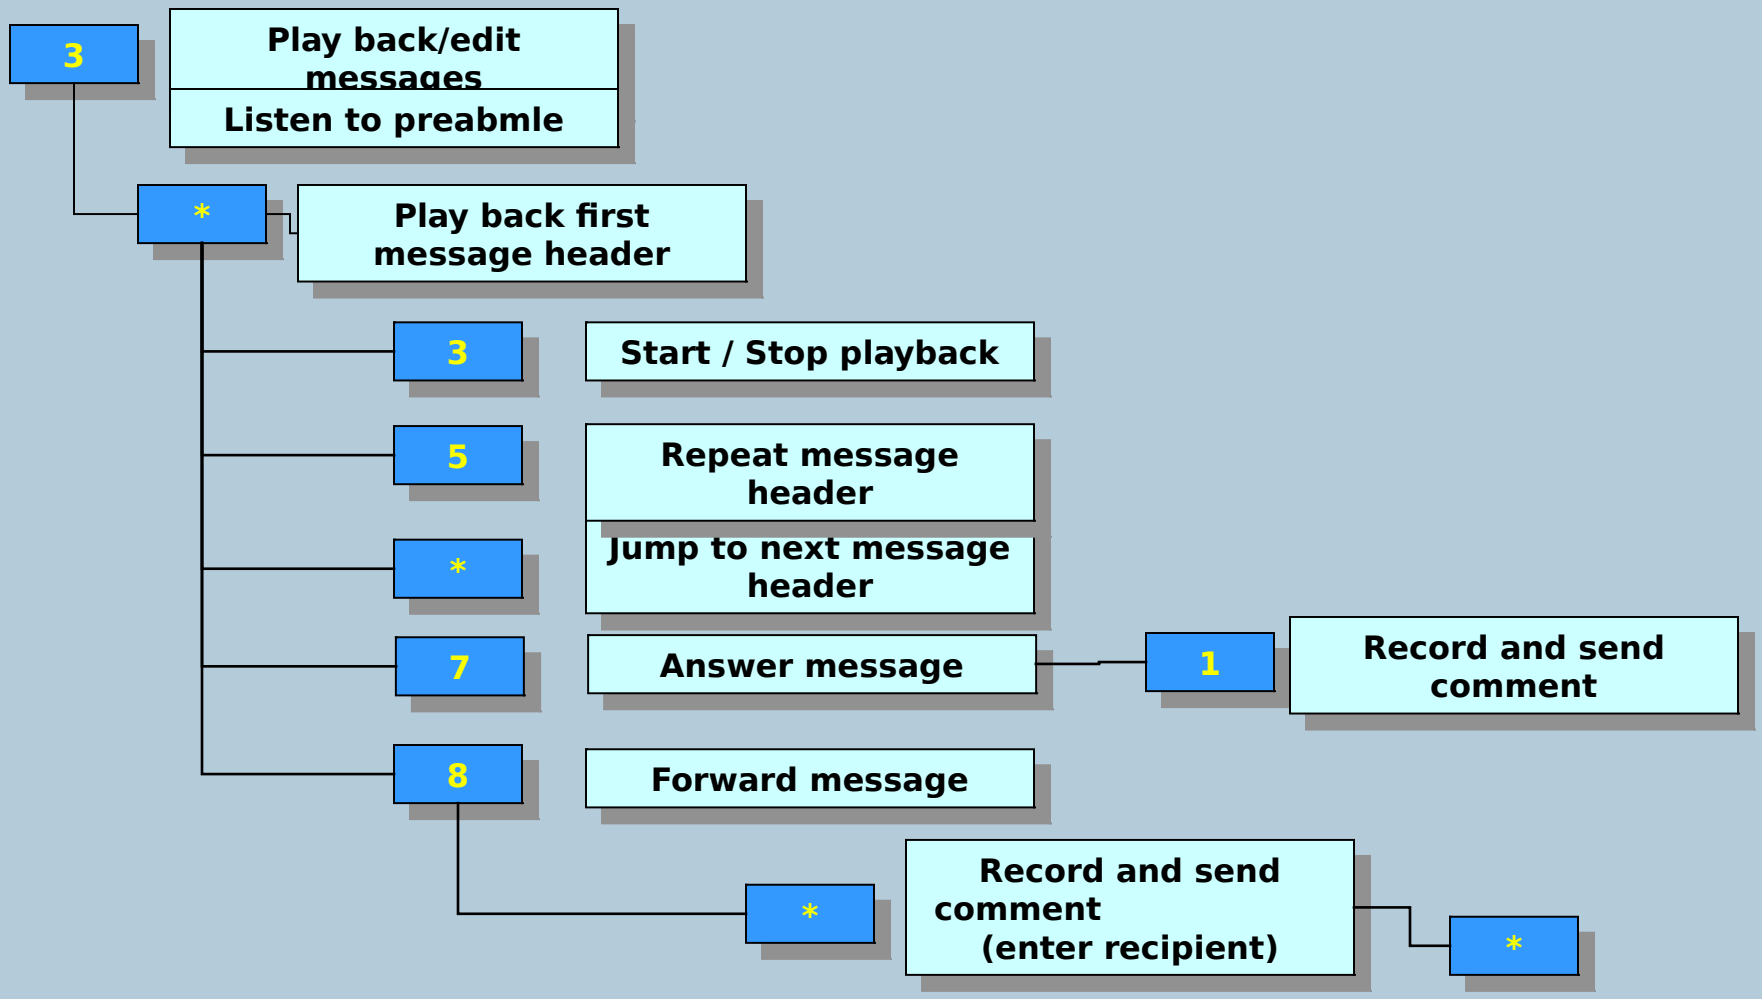

press „0“ & „*“ for cancel and return to main menu

Xpression – VMS – Hohenfels

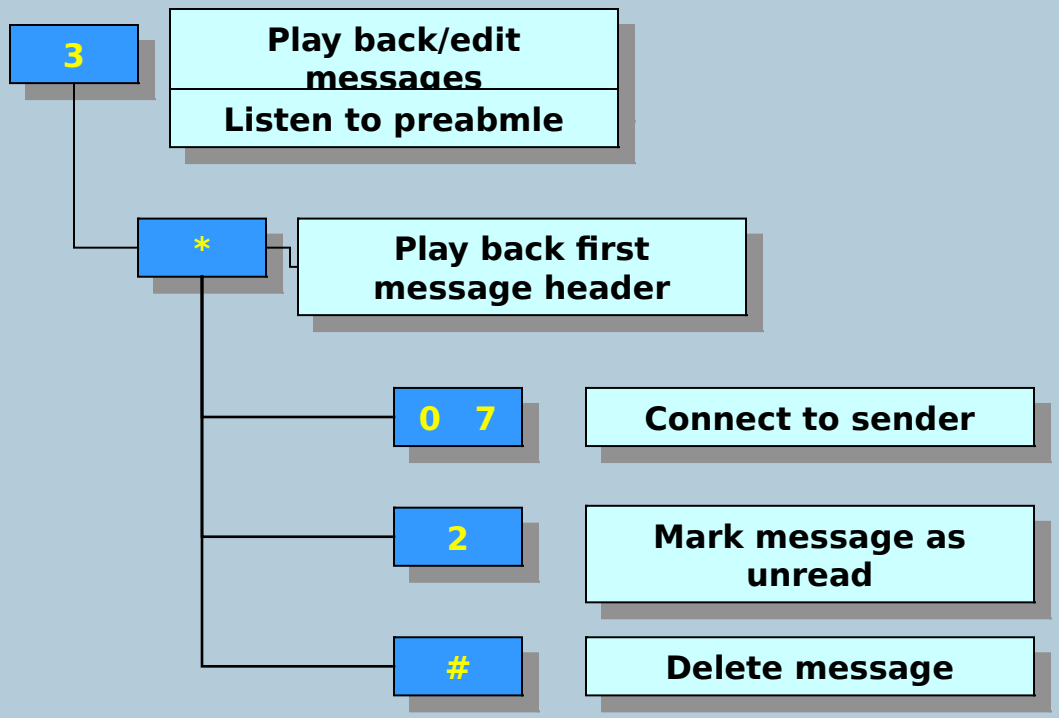

press „0“ & „*“ for cancel and return to main menu

Xpression – VMS – Hohenfels

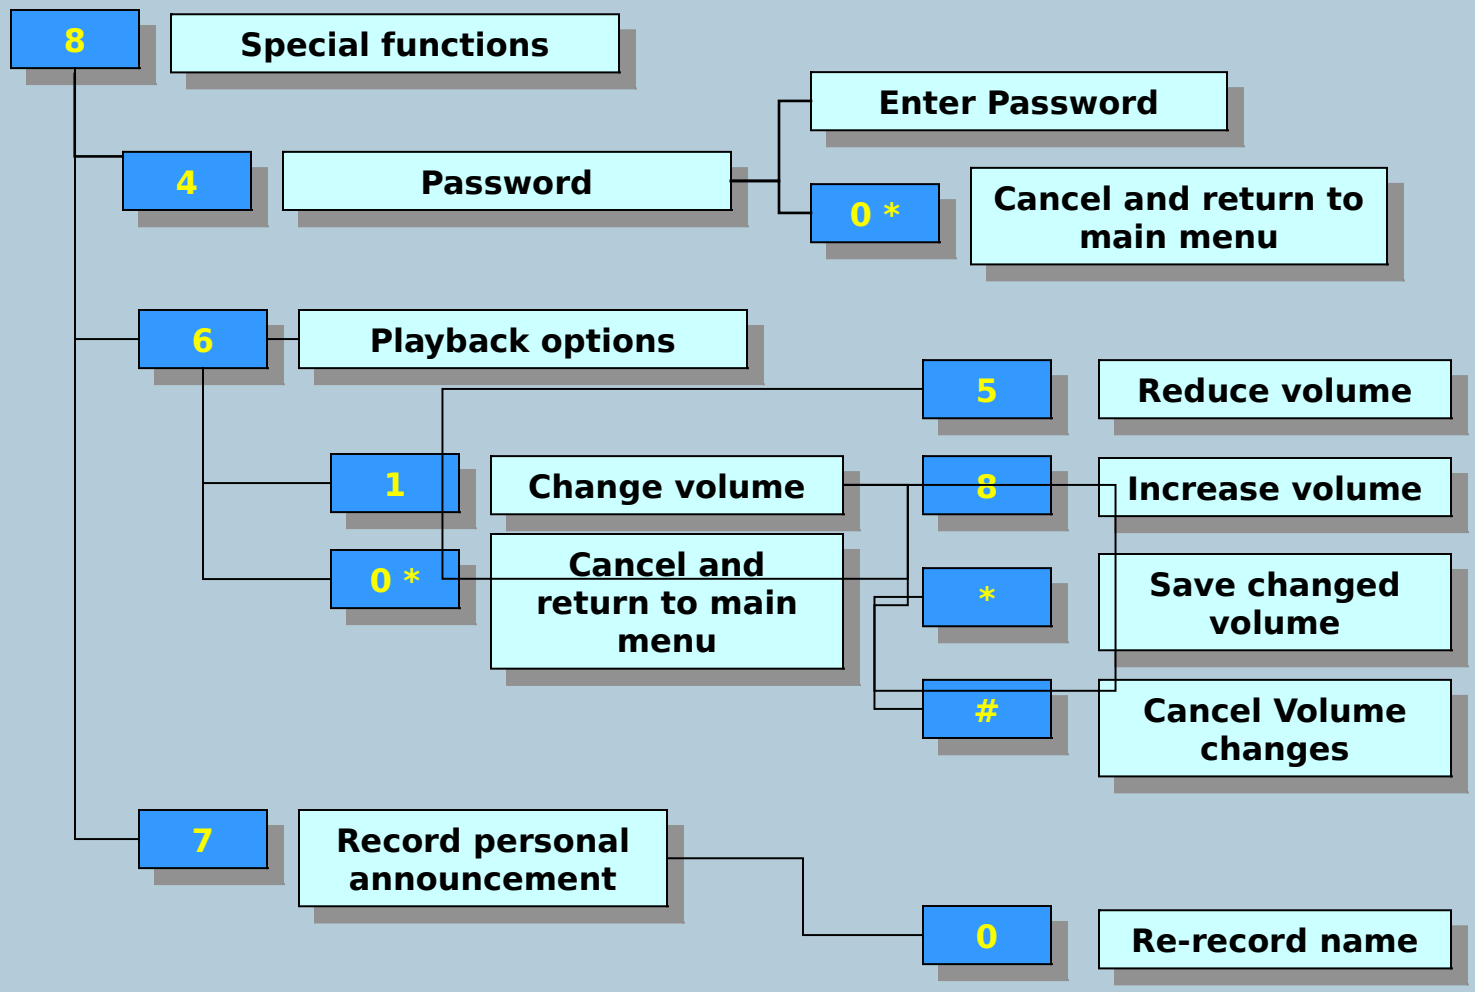

press „0“ & „*“ for cancel and return to main menu

Xpression – VMS – Hohenfels

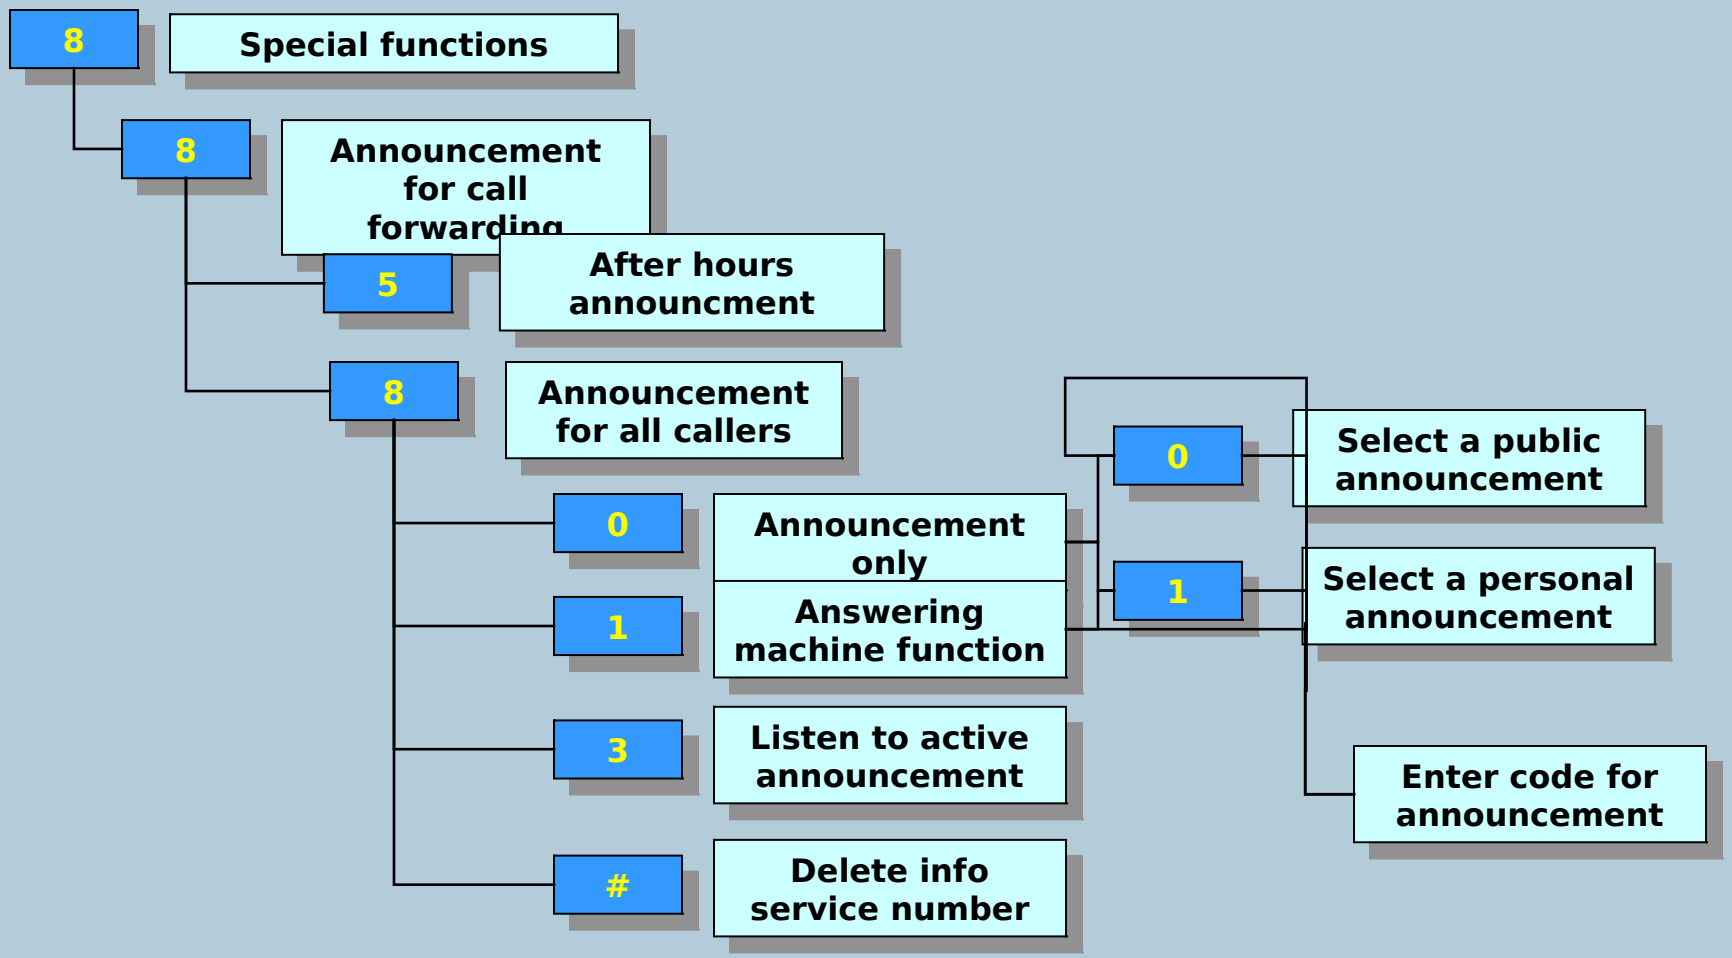

press „0“ & „*“ for cancel and return to main menu

Xpression – VMS – Hohenfels

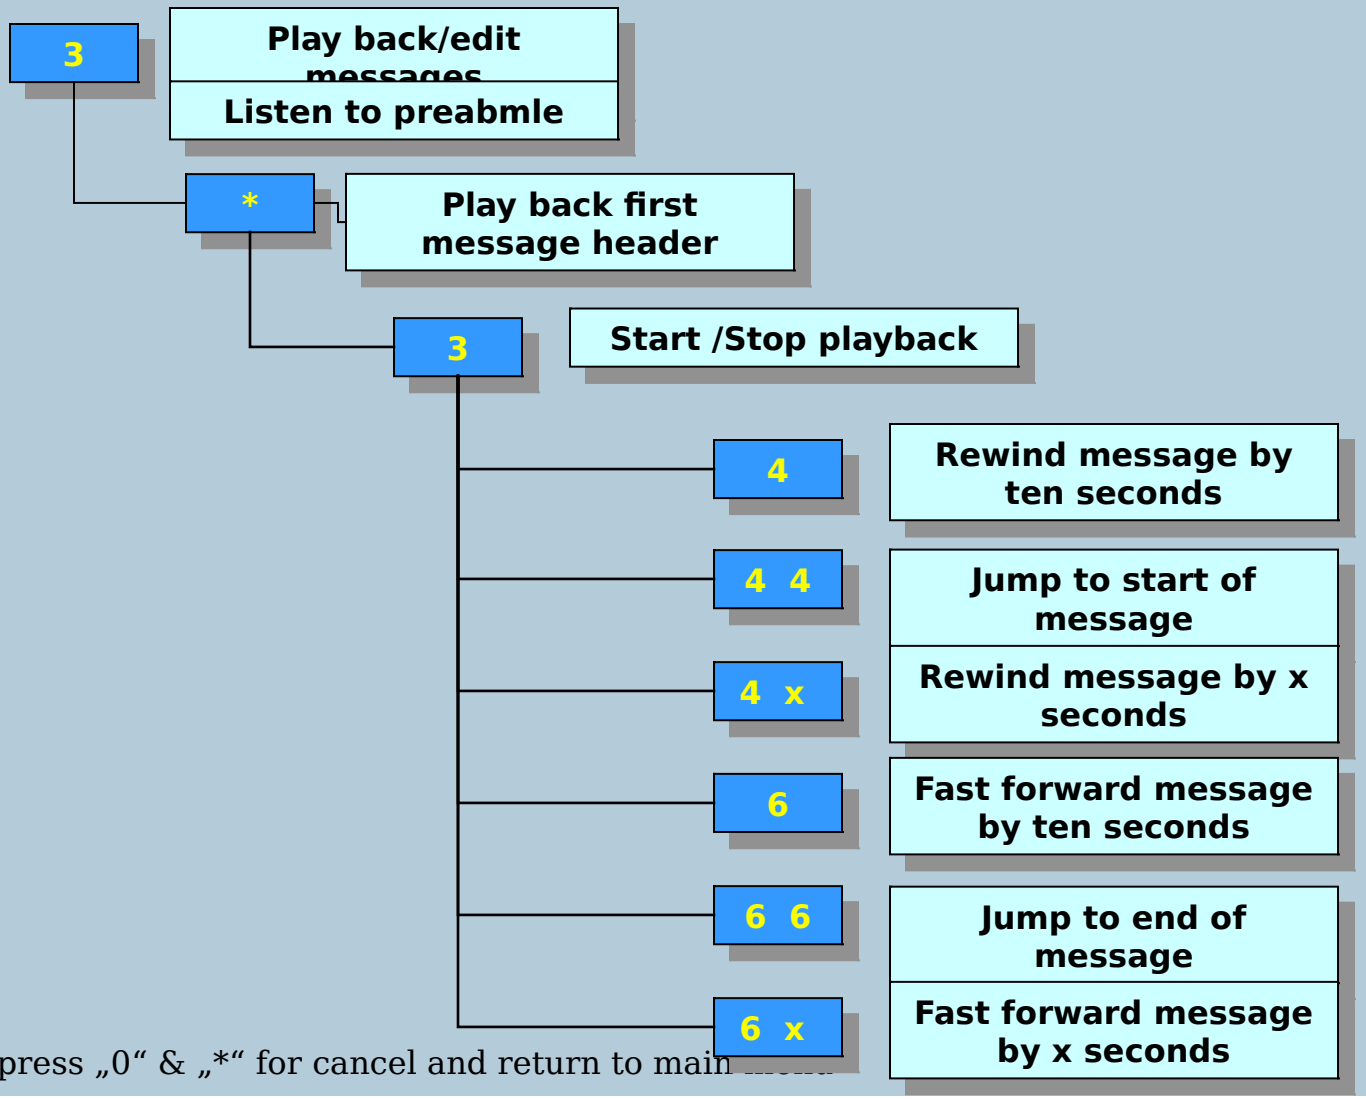

press „0“ & „*“ for cancel and return to main menu

Xpression – VMS – Hohenfels

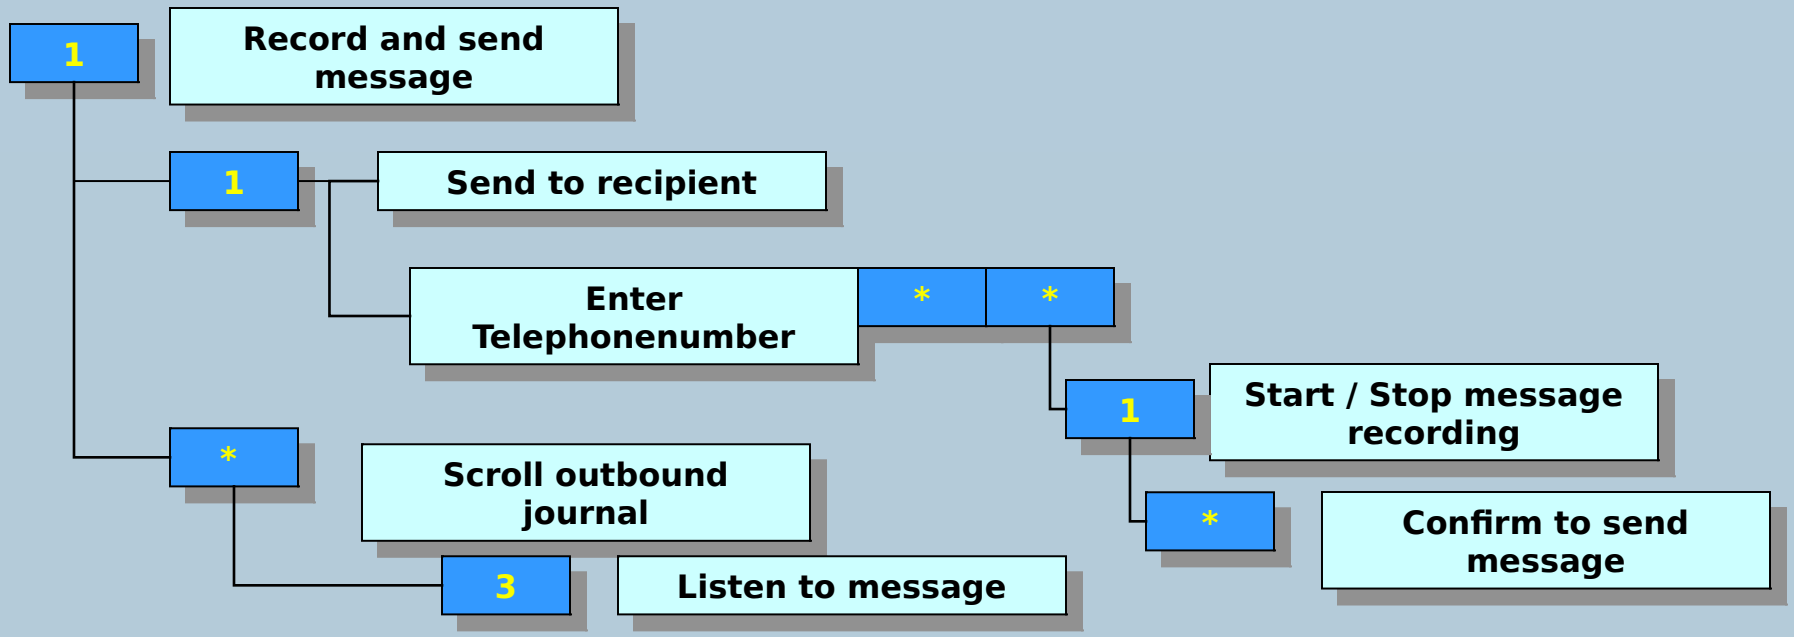

press „0“ & „*“ for cancel and return to main menu